(19) World Intellectual Property Organization

International Bureau



I 18219 BANDER IN BORNE NEW BEAN BERN BORN IN HA BODE DAWN BEICH BAND BAND BAN BURDEN DAR HOEL BAND BERN

(43) International Publication Date 17 June 2004 (17.06.2004)

PCT

(10) International Publication Number WO 2004/050535 A2

(51) International Patent Classification⁷:

B67D

(21) International Application Number:

PCT/IB2003/005411

(22) International Filing Date:

26 November 2003 (26.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0227941.2

29 November 2002 (29.11.2002)

(71) Applicant (for all designated States except US): INTER-BREW S.A. [BE/BE]; Vaarstraat 94, B-3000 Leuven (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WAUTERS, Albert [BE/BE]; Admiraalhof 24, B-9070 Destelbergen (BE). AN-DERSON, Ian [GB/GB]; 19 Silver Street, Burwell, Cam-


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the begin-

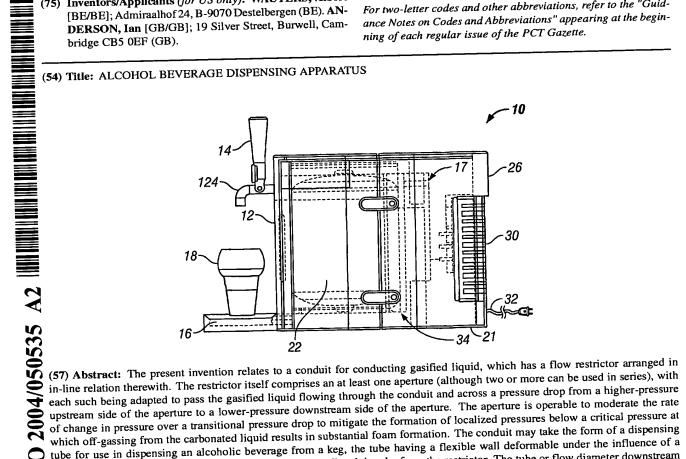

which off-gassing from the carbonated liquid results in substantial foam formation. The conduit may take the form of a dispensing tube for use in dispensing an alcoholic beverage from a keg, the tube having a flexible wall deformable under the influence of a restricting actuator to control the partial collapse of the wall and thereby form the restrictor. The tube or flow diameter downstream of the restrictor only gradually or slowly increases.